


HIKVISION

About HIKVISION:

Hikvision Digital Technology Co., Ltd. is one of the world's leading suppliers of video surveillance products and Solutions. Established in 2001, Hikvision has grown from a small company with 28 people into a global enterprise with More than 6,000 employees, including 2,000 R&D engineers. With the largest R&D team in the industry and capability Of continuous innovation, Hikvision's product offerings include hybrid DVRs, NVRs, standalone DVRs, digital video

Functions:

WDR (Wide Dynamic Range)

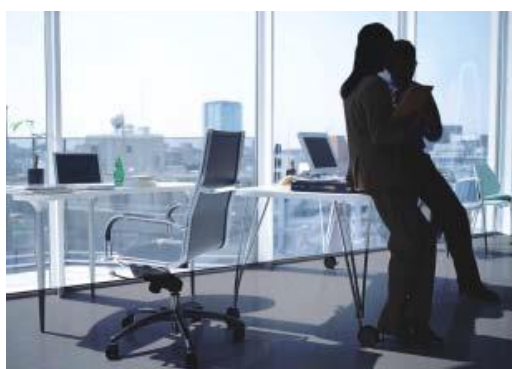

Conventional Camera



WDR Camera

ICR (Infrared Cut filter Removal)



Without ICR



with ICR

BLC (Backlight Compensation)



Conventional Camera



With BLC

HIKVISION

HLC (Highlight Compensation)



HLC off



HLC On

AWB (Automatic White Balance)



Conventional Camera



With AWB

3D DNR (Digital Noise Reduction)



Conventional Camera



With 3D DNR

Smart IR













General IR Camera







































Smart IR Camera

HIKVISION



































PRICE LIST 2015

sr	Model	Photo	lens	Descriptions	UP
CCTV CAMERA 600TVL					
1	DS-2CE1582P(N)-IR1 (3.6mm lens)			600 TVL, 1/3" DIS, 20m IR Distance, ICR, 0.1 Lux/F1.2,12 VDC, Wide operating temperature Range (-40°~60°), IP66, (3.6mm Lens F1.8 Lens) (Outdoor)	550
2	DS-2CE1582P(N)-IR3 (6mm lens)			600 TVL, 1/3" DIS, 40m IR Distance, ICR, 0.1 Lux/F1.2,12 VDC, Wide operating temperature Range (-40°~60°), IP66, (3.6mm Lens F1.8 Lens) (Outdoor)	675
3	DS-2CE5582P(N)-VFIR3 (2.8:12mm)			600 TVL, 1/3" DIS, 40m IR Distance, ICR, 0.1 Lux/F1.2,12 VDC, Wide operating temperature Range (-40°~60°), IP66, 2.8 - 12mm/F1.4 Vari-focal Lens (Outdoor)	788
CCTV CAMERA 700TVL					
4	DS-2CE55A2P (2.8mm lens)			• 700 TVL Horizontal Resolution • Electronic Day/Night • 2.8mm Fixed Lens • 0.1 lux /F1.2 (Indoor)	300
5	DS-2CE15A2P-IR (3.6mm lens)			• 700 TVL Horizontal Resolution • True Day/Night • 3.6mm Fixed Lens, 0.1 lux /F1.2 • 20m IR Distance (Outdoor)	425
6	DS-2CE15A2P-IR (6mm lens)			• 700 TVL Horizontal Resolution • True Day/Night • 6mm Fixed Lens, 0.1 lux /F1.2 • 20m IR Distance (Outdoor)	425
7	DS-2CE15A2P-VFIR3 (2.8:12mm lens)			• 1/3" DIS • True Day/Night • 700 TVL horizontal resolution • 2.8 ~ 12mm vari-focal lens • 40m IR distance • IP66 Weatherproof (Outdoor)	800
8	DS-2CS58A1P-IRS (2.8mm lens)			• 1/3" DIS • 700 TVL horizontal resolution • Motion Detection On/Off, maximum 6 zones • Lens 2.8mm : 0.1 Lux @ F1.2 (0 Lux with IR) • Built-in Microphone • True Day/Night • IP66 rating • 20m IR Distance • OSD Menu (Outdoor)	975
9	DS-2CE55A2P-VFIR3 (2.8:12mm lens)			• 1/3" DIS • True Day/Night • 700 TVL horizontal resolution • 2.8 ~ 12mm vari-focal lens • 40m IR distance • IP66 Weatherproof (Outdoor)	888
Analogue PTZ					
10	DS-2AE4162-A3- 12X			1/3" SONY Interline Transfer EXview HAD-II CCD , 650TVL horizontal resolution, 12X optical zoom, 16X digital zoom, True Day/Night, 3D DNR, D WDR, 3D intelligent positioning, Alarm input & output	3475
12	DS-2AE7023I- (23X)			23X Outdoor Infrared Analogue PTZ Camera. 1/3" Sony CCD, ICR, 700TVL, 0.002Lux/(AGC ON), Digital Zoom: 16x, 3D DNR, Digital WDR, IR Distance: 120M, 24VAC	6225
13	DS-2AE7158-A (36X)			PAL:752(H)×582(V), NTSC:768(H)×494(V), 1/4" Sony CCD, ICR, Color • 540 TVL, 0.1 Lux/F1.6, B/W 600 TVL, 0.01 Lux/F1.6,Optical zoom: 36x, Focus: 3.4-122.4mm, Digital zoom: 16x, 3D DNR, Digital WDR, Pan Speed: 0.1° -160°/s, Tilt Speed: 0.1° -120°/s, 24 VAC,100m IR Distance	7475
14	DS-2AE4562-A (12X)			• 1/3" SONY Interline Transfer EXview HAD-II CCD • 650TVL horizontal resolution • 12X optical zoom • Up to 50m IR distance • True Day/Night, 3D DNR, D WDR • 3D intelligent positioning • Alarm input & output	4225
15	DS-2AE7037I- 37X			Analog Camera Speed Dome 960H, 1/3 ", optical zoom 37x, wide infrared illumination as 120m.	7725
16	DS-2AE7023I- 23X			700TVL , 23X optical zoom, Up to 120m IR distance, Built-in temperature sensor, IP66, RS-485, IR Cut Filter, Focal Length 4- 92mm, WDR, 0 Lux, Auto focus, auto white balance, backlight compensation and auto/manual day & night switch,	5605
17	DS-2AE7037- 37X			700TVL , 37X optical zoom, Up to 120m IR distance, Built-in temperature sensor, IP66, RS-485, IR Cut Filter, Focal Length 3.2-118.4mm , WDR, 0 Lux, Auto focus, auto white balance, backlight compensation and auto/manual day & night switch,	6955
TURBO HD					
Hikvision Turbo HD Analog solution as a top-notch technology enables up-to 500m 1080P video transmission over coax and offers seamless compatibility with traditional SD cameras, Hikvision IP cameras, and HDTVI-compliant cameras and DVRs.					
18	DS-2CE16C2T-IR- (2.8mm lens)			HD720p,1/3" CMOS, 24 pcs IR LEDs, 20m Outdoor IR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66,, 2.8mm Lens, 1 Analog HD output, DNR	565
19	DS-2CE16C2T-IR (6mm lens)			HD720p,1/3" CMOS, 24 pcs IR LEDs, 20m IR, Outdoor IR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66, 6mm Lens	565
20	DS-2CE56C2T-IR- (2.8mm lens)			HD720p,1/3" CMOS, 24 pcs IR LEDs, 20m IR, Outdoor IR Eyeball, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66 2.8mm Lens	540
21	DS-2CE56C2T-IRM- (2.8mm lens)			HD720p,1/3" CMOS, 24 pcs IR LEDs, 20m IR, Outdoor IR Eyeball, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, IP66 2.8mm Lens	565
22	DS-2CE16C2T-IT3 (8mm lens)			HD720p,1/3" CMOS, 1 pcs EXIR LED, 40m IR, Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 8mm Lens	720
23	DS-2CE16C2T-IT5- (12mm lens)			HD720p,1/3" CMOS, 2 pcs EXIR LEDs, 80m IR, Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.212mmLens	810
24	DS-2CE16C5T-VFIR3- (2.8:12mm lens)			HD720p,1/3" CMOS, 42 pcs IR LEDs, 40m IR, Outdoor IR Vari-focal Bullet, ICR,	1440
































HIKVISION

25	DS-2CE56C5T-VFIT3- (2.8:12mm lens)			HD720p,1/3" CMOS, 1 pcs EXIR LED, 50m IR, Outdoor EXIR Vari-focal Eyeball, ICR, 2.8~12mm Lens	1525
26	DS-2CE16D5T-VFIT3- (2.8:12mm lens)			HD1080p,1/3" CMOS, 1 pcs EXIR LED, 50m IR, Outdoor EXIR Vari-focal Bullet, , IP66, 2.8~12mm Lens	2350
27	DS-2CE56D5T-VFIR- (2.8:12mm lens)			HD1080p,1/3" CMOS, 24 pcs IR LEDs, 30m IR, Indoor IR Vari-focal Dome, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR	1950
28	DS-2CE56D5T-VFIT3- (2.8:12mm lens)			HD1080p,1/3" CMOS, 1 pcs EXIR LED, 50m IR, Outdoor EXIR Vari-focal Eyeball 2.8~12mm Lens	1395
29	DS-2AE7230TI- 30X TURBO HD			30X Optical Zoom, 16X digital Zoom ,1/2.8" CMOS, 1920x1080:30fps, 3D DNR, ICR, Color: 0.2lux/F1.6, B/W:0.02lux/F1.6, 120m IR Distance, 2MP CMOS Image Sensor	11000
30	DS-2AE7123TI- 23X TURBO HD			23X Optical Zoom, 16X digital zoom, 1/3" CMOS, 1280x720:30fps, 3D DNR, ICR, Color: 0.2lux/F1.6, B/W:0.02lux/F1.6, 1.3MP CMOS Image Sensor, Support up the coax function, 8 patrols, up to 32 presets per patrol	7400
31	DS-2DE2103-DE3- 3X TURBO HD			Optical Zoom 3X, 0.05Lux, Lens 3.6:11mm, Image Resolution 1280x720, 30 FPS, BLC/DWDR, Built-in Micro SD card slot, up to 64GB, edge recording	2250
IP CAMERA					
32	DS-2CD2Q10FD-IW (4mm lens)		1MP	• 1 megapixel • Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB • Two-way audio • Built uilt -in microphone and speaker • Support Wifi & wps • IR cut filter • IR Range 10 meters (Indoor)	1500
33	DS-2CD2D14WD		1MP	• HD720p video • 100dB WDR • 3D DNR	1080
34	DS-2CD2412F-I (2.8mm lens)		1.3MP	• Up to 1.3 megapixel (1280 x 960) resolution • HD real-time video • PIR detection • IR LEDs (up to 10m) • DWDR & 3D DNR & BLC • Built-in microphone & speaker • SD/SDHC/SDXC card slot (up to 64GB) • Wi-Fi optional (WPS connection) (Indoor)	1373
35	DS-2CD2012-I (4mm lens)		1.3MP	•1/3" Progressive CMOS, ICR, 0.01lux/F1.2, •1280x960:25fps(P)/30fps(N),6mm/F2.0 lens (4mm) (Outdoor)	1553
36	DS-2CD2212-I (6mm lens)		1.3MP	•1/3" Progressive CMOS, ICR, 0.01lux/F1.2, •1280x960:25fps(P)/30fps(N),6mm/F2.0 lens (6mm), IR LEDs (Outdoor)	2480
37	DS-2CD2612F-I (2.8:12mm)		1.3MP	• Up to 1.3 megapixel (1280 x 960) resolution • HD real-time video • Vari-focal lens • IR LEDs (up to 30m) • DWDR & 3D DNR & BLC • IP66 • Support on-board storage (up to 64GB) (Outdoor)	3195
38	DS-2CD2612F-IS (2.8:12mm)		1.3MP	• Up to 1.3 megapixel (1280 x 960) resolution • HD real-time video • 2.8 ~ 12mm vari-focal lens • IR LEDs (up to 30m) • DWDR & 3D DNR & BLC • IP66 • Support on-board storage (up to 64GB) • (-S) Audio I/O, Alarm I/O (Outdoor)	3420
39	DS-2CD2510F (2.8mm lens)		1.3MP	• 1.3 megapixel (1280 x 960) resolution • Full HD1080p Video • Up to 10m IR • DWDR/3D DNR/BLC • Support On-board Storage, up to 64GB	1180
40	DS-2CD2512F-I (2.8mm lens)		1.3MP	• Up to 1.3 megapixel (1280 x 960) resolution • HD real-time video • -I: IR LEDs (up to 10m) • DWDR & 3D DNR & BLC • Onboard storage (up to 64 GB) • IP66 protection • Vandal-proof housing	1823
41	DS-2CD2512F-IS (2.8mm lens)		1.3MP	• Up to 1.3 megapixel (1280 x 960) resolution • HD real-time video • -I: IR LEDs (up to 10m) • DWDR & 3D DNR & BLC • Onboard storage (up to 64 GB) • -S: Audio I/O, Alarm I/O • IP66 protection • Vandal-proof housing	1960
42	DS-2CD2112-I (4mm lens)		1.3MP	•1/3" Progressive CMOS, ICR, IR LEDs, 0.01lux/F1.2, •1280x960:25fps(P)/30fps(N),6mm/F2.0 lens (2.8mm) (Outdoor)	1553
43	DS-2CD2312-I (6mm lens)		1.3MP	•1/3" Progressive CMOS, ICR, 0.01lux/F1.2, •1280x960:25fps(P)/30fps(N),F2.0 lens (6mm), IR LEDs	1823
44	DS-2CD2712F-I (2.8:12mm lens)		1.3MP	• 1.3 megapixel (1280 x 960) resolution • HD real-time video • IR LEDs: up to 20m • DWDR & 3D DNR & BLC • Support on-board storage (up to 64GB) • IP66 • Vandal-proof (Outdoor)	3240
45	DS-2CD2712F-IS (2.8:12mm lens)		1.3MP	• 1.3 megapixel (1280 x 960) resolution • HD real-time video • IR LEDs: up to 20m • DWDR & 3D DNR & BLC • Support on-board storage (up to 64GB) • (-S) Audio I/O, Alarm I/O • IP66 • Vandal-proof (Outdoor)	3465
46	DS-2CD2420FD-I (2.8mm Lens)		2MP	Up to 2 megapixel (1920 x 1080 @ 30 fps) resolution, Lens 2.8mm, CMOS, IR range 10M, Two-way audio, Built-in microphone and speaker, IR cut filter with auto switch, 3D digital Noise Reduction, 0.05Lux, WDR,	1195
47	DS-2CD2520F (2.8mm Lens)		2MP	Up to 2 megapixel (1920 x 1080 @ 30 fps) resolution, Lens 2.8mm, CMOS, IR range 10M, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, IR cut filter, POE, 0.05Lux, WDR, IP66, 3D digital Noise Reduction	1260
48	DS-2CD2020-I (4mm Lens)		2MP	2 megapixel (1920 x 1080) resolution, CMOS, 20 to 30 meters IR range, ICR, IP66, 0.07Lux& 0 Lux with IR, 4mm Lens, Digital WDR, 3D DNR	1305
49	DS-2CD2020-I (6mm Lens)		2MP	2 megapixel (1920 x 1080) resolution, CMOS, 20 to 30 meters IR range, ICR, IP66, 0.07Lux& 0 Lux with IR, 6mm Lens, Digital WDR, 3D DNR	1305
50	DS-2CD2120F-I (2.8mm Lens)		2MP	2 megapixel (1920 x 1080) resolution, CMOS, 30 meters IR range, ICR, IP66, 0.05Lux& 0 Lux with IR, 6mm Lens, Digital WDR, 3D DNR	1305
51	DS-2CD2720F-I (2.8:12mm lens)		2MP	2 megapixel (1920 x 1080) resolution, real-time output, 20 meters IR range, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, IR cut filter with auto switch, PoE, IP66, 2.8 - 12 mm Lens	2790
52	DS-2CD2820F (3.5 mm Lens)		2MP	2 megapixel (1920 x 1080) resolution, real-time output, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, IR cut filter with auto switch, PoE, 0.05 Lux, ONVIF, POE, 1 Alarm Input,1 Alarm Output, 1-ch 3.5 mm audio interface, Mic in/Line in, 1-ch 3.5 mm audio interface	2410
53	DS-2CD2620F-I (2.8:12mm lens)		2MP	Up to 2 megapixel (1920 x 1080) resolution, 30 meters IR range, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, IR cut filter with auto switch, PoE, 3D DNR, IP66, 0.01 Lux, 2.8 - 12 mm Lens,	2700
54	DS-2DF5220-D4 (Length 4.7-94mm, 20x)		2MP	2 megapixel (1920 x 1080) resolution full HD, 20X Optical Zoom, indoor, WDR, Smart Tracking, Smart Detection, POE, CMOS sensor, IR Cut Filter, 300 Preset, Alarm I/O, 1 audio input and 1 audio output, 1 HDMI interface, Micro SD/SDHC card recording	14625

HIKVISION

55	DS-2CD2032-I (4mm lens)		3MP	•1/3" Progressive CMOS, ICR, 0.1lux/F1.2, •2048x1536:12.5fps(P)/15fps(N),6mm/F2.0 lens (4mm) (Outdoor)	1780
56	DS-2CD2132F-I (2.8mm lens)		3MP	• 3 Megapixel High Resolution • Full HD1080p Video Output • Low Illumination • 3D DNR & DWDR & BLC • IP66 Rating • IR Range: up to 30m , POE	1780
57	DS-2CD2T32-I5 (8mm lens)		3MP	8mm Lens, IP66, POE, ICR, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, Motion detection, tampering alarm, scene change detection, face detection, intrusion detection, Line crossing detection, IR LEDs	1960
58	DS-2CD2T32-I8 (12mm lens)		3MP	12mm Lens, IP66, POE, ICR, Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB, Motion detection, tampering alarm, scene change detection, face detection, intrusion detection, Line crossing detection, IR LEDs	2115
59	DS-2CD2232-I (6mm lens)		3MP	•1/3" Progressive CMOS, ICR, 0.1lux/F1.2, •2048x1536:12.5fps(P)/15fps(N), 6mm/F2.0 lens (6mm), IR LEDs (Outdoor)	3280
60	DS-2CD2332-I (6mm lens)		3MP	•1/3" Progressive CMOS, ICR, 0.1lux/F1.2, •2048x1536:12.5fps(P)/15fps(N), 4mm/F2.0 lens (6mm), IR LEDs	2320
61	DS-2CD2532F-I (2.8mm lens)		3MP	• Up to 3 megapixel (2048 x 1536) resolution • Full HD1080p real-time video • -I: IR LEDs (up to 10m) • DWDR & 3D DNR & BLC • Onboard storage (up to 64 GB) • IP66 protection • Vandal-proof housing	2115
62	DS-2CD2532F-IS (2.8mm lens)		3MP	• Up to 3 megapixel (2048 x 1536) resolution • Full HD1080p real-time video • -I: IR LEDs (up to 10m) • DWDR & 3D DNR & BLC • Onboard storage (up to 64 GB) • -S: Audio I/O, Alarm I/O • IP66 protection • Vandal-proof housing	2205
63	DS-2CD2632F-I (2.8:12mm lens)		3MP	• Up to 3 megapixel (2048 x 1536) resolution • Full HD1080p real-time video • 2.8 ~ 12mm vari-focal lens • IR LEDs (up to 30m) • DWDR & 3D DNR & BLC • IP66 • Support on-board storage (up to 64GB) (Outdoor)	3670
64	DS-2CD2632F-IS (2.8:12mm lens)		3MP	• Up to 3 megapixel (2048 x 1536) resolution • Full HD1080p real-time video • Vari-focal lens • IR LEDs (up to 30m) • DWDR & 3D DNR & BLC • IP66 • Support on-board storage (up to 64GB) • (-S) Audio I/O, Alarm I/O (Outdoor)	3800
65	DS-2CD2732F-I (2.8:12mm lens)		3MP	• 3 megapixel (2048 x 1536) high resolution • Full HD1080p real-time video • IR LEDs: up to 20m • DWDR & 3D DNR & BLC • Onboard storage (up to 32GB) • IP66 • Vandal-proof (Outdoor)	3720
66	DS-2CD2732F-IS (2.8:12mm lens)		3MP	• 3 megapixel (2048 x 1536) high resolution • Full HD1080p real-time video • IR LEDs: up to 20m • DWDR & 3D DNR & BLC • Onboard storage (up to 32GB) • (-S) Audio I/O, Alarm I/O • IP66 • Vandal-proof (Outdoor)	3720
67	DS-2CD2942F (Mini Fisheye)		4MP	4MP Mini Fisheye Camera, 1.6mm Lens, Built-in Micro SD/SDHC/SDXC slot, up to 64 GB, POE, Multiple viewing modes, 2464x1520 resolution	2680
68	DS-2CD2942F-I (Mini Fisheye with IR)		4MP	4MP Mini Fisheye Camera, 1.6mm Lens, Built-in Micro SD/SDHC/SDXC slot, up to 64 GB, POE, Multiple viewing modes, 2464x1520 resolution, Alarm in, IR LEDs	3690
IP PTZ					
69	DS-2DE4120-AE3 (16X) (indoor)			1MP, • 1/3" Progressive Scan CMOS, 720P HD real-time resolution, 20X Optical zoom, 16X digital zoom, True Day/Night, D WDR , 3D DNR, Privacy Mask, Alarm input/output, 3D intelligent positioning, PoE+/ PoE, Built-in micro SD card slot, up to 64GB, support edge recording	5725
70	DS-2DE5174-A3 (20X) (indoor)			•1.3 MP, 1/3"Progressive Scan CMOS, 3D DNR, ICR, Color: 0.05 lux/F1.6, B/W:0.01 lux/F1.6, • Optical Zoom:20x, Focus:4.7-94.0 mm, 1280*960: 30fps, HD720p:30fps, Pan Speed: 0.1° -250°/s, Tilt Speed: 0.1° -150°/s, 24 VAC	7580
71	DS-2DE4220-AE3- (20X) (indoor)			2MP, Optical Zoom 20X, 1/2.8" Progressive Scan CMOS, 1080P Full HD real-time resolution, 20X Optical zoom, 16X digital zoom, True Day/Night, D WDR , 3D DNR, Privacy Mask, Alarm input/output, 3D intelligent positioning PoE+/ PoE / 24VAC power supply, IR Cut Filter	7225
72	DS-2DE7174-A- (20X) (Outdoor)			1.3MP, 1/3"Progressive Scan CMOS, 1280 × 960 HD resolution, 20X optical zoom, 16X digital zoom, 100m IR distance, True Day/Night, 3D DNR, Digital WDR, 3D intelligent positioning, Support 24VAC / High-PoE power supply	7630
73	DS-2DE7186-A (30X) (Outdoor)			•1/2.8" Progressive Scan CMOS •1080P Full HD resolution •30X optical zoom •100m IR distance •True Day/Night, 3D DNR, Digital WDR •3D intelligent positioning •24VAC / High-PoE power supply	15000
Accessories					
74	DS-1601ZJ			Mount: Corner mount / Feature: Suitable for corner mount / Construction: Aluminum alloy ,Dimension: 176.8x194x419.5mm	200
75	DS-1661ZJ			Mount: Pendant mount (20cm) / Feature: Suit for 200mm pendant mount / Construction: Aluminum alloy / Dimension: Φ116.5x200mm	220
76	DS-6701HFI			• H.264/MPEG4/MPEG2/MJPEG encoding standards supported • Support encoding video at up to 4CIF resolution • One independent PoE network interfaces for DS-6701/6704HFI models; • Connectable with network HDD in NAS, IPSAN mode • Support multiple network protocols, including IPv4/v6, HTTP, HTTPS, QoS layer3 DiffServ, FTP, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3, OnVIF, PSIA, SOCKSv4/v5, etc.; • Multiple PTZ protocols	1720
77	DS-6701HWI			• H.264/MPEG4/MPEG2/MJPEG encoding standards supported • Support encoding video at up to 4CIF resolution for DS-6700HFI (-SATA) and up to WD1 resolution for DS-6701/6704HFI/HWI models; • Connectable with network HDD in NAS, IPSAN mode • Support multiple network protocols, including IPv4/v6, HTTP, HTTPS, QoS layer3 DiffServ, FTP, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3, OnVIF, PSIA, SOCKSv4/v5, etc.; • Multiple PTZ protocols	1980
78	DS-1004KI			• Switch the keyboard mode by key • DVR menu control function. • PTZ control. • Setting and calling the preset, patrol, and pattern • Switch the Video Wall display and set the Video Wall layout • Video switch control for the analog matrix.	2840
79	HST-781MKB			This PTZ keyboard controller features a 3D joystick with LCD read-out making it ideal for setting functions, viewing protocols or viewing PTZ IDs and call presets. It's compatible with all popular protocols through a standard RS485 connection	1200
80	HST-781UKB			• Port for USB connection • USB interface connected to PC and control the PTZ and network cameras • Three-axis with precision and easy to use • Compact design	1200

HIKVISION

81	DS-6701HFI			<ul style="list-style-type: none"> • H.264/MPEG4/MPEG2/MJPEG encoding standards supported • Support encoding video at up to 4CIF resolution • One independent PoE network interfaces for DS-6701/6704HFI models; • Connectable with network HDD in NAS, IPSAN mode • Support multiple network protocols, including IPv4/v6, HTTP, HTTPS, QoS layer3 DiffServ, FTP, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3, OnVIF, PSIA, SOCKSv4/v5, etc. 	1720
Digital Video Recorder (DVR)					
82	DS-7104HVI-SL 1Audio			4-ch video&1-ch audio input Support 1 SATA HDD Up to 4TB capacity and 2 UBS2.0 ports for easy backup, CIF/QCIF: 25/30fps. Mobile view on 3G/Wifi enabled device (iPhone, Android)	725
83	DS-7204HI-SL 4Audio			4-ch video&4-ch audio input, Support 1 SATA HDD Up to 4TB capacity and 2 UBS2.0 ports for easy backup, CIF/QCIF: 25/30fps. Mobile view on 3G/Wifi enabled device (iPhone, Android), RS-485 port	960
84	DS-7104HVI-SH 1Audio			4-ch video&1-ch audio input Support 1 SATA HDD Up to 4TB capacity and 2 UBS2.0 ports for easy backup, CIF/QCIF: 25/30fps. Mobile view on 3G/Wifi enabled device (iPhone, Android)	870
85	DS-7108HVI-SH 1Audio			8-ch video&1-ch audio input Support 1 SATA HDD Up to 4TB capacity and 2 UBS2.0 ports for easy backup, CIF/QCIF: 25/30fps. Mobile view on 3G/Wifi enabled device (iPhone, Android)	1260
86	DS-7104HWI-SL 1Audio			4-ch video&1-ch audio input, 1 SATA interface, WD1: 25(P) / 30(N) fps/ch, mini 1U case	970
87	DS-7204HWI-SH 4Audio			4-ch video&4-ch audio input, 1 SATA (4-ch)/2 SATA (8/16-CH) interface, WD1: 25(P) / 30(N) fps/ch, 1U case, HDMI and VGA output at up to 1920x1080P resolution	1140
88	DS-7208HWI-SH 8Audio			8-ch video&8-ch audio input, 1 SATA (4-ch)/2 SATA (8/16-CH),WD1: 25(P) / 30(N) fps/ch, alarm I/O: 8/4,1U case, 19", HDMI and VGA output at up to 1920x1080P resolution	1950
89	DS-7204HVI-SV 4Audio			<ul style="list-style-type: none"> • 4-ch video&4-ch audio input • H.264 video compression • 1 SATA interfaces • CIF resolution real-time recording • Up to WD1(960*576) resolution recording • HDMI and VGA output at up to 1920x1080P resolution • Dual-stream 	1110
90	DS-8104HMI-SE			<ul style="list-style-type: none"> • Video input 4-ch • Video output 2-ch • Audio input 1-ch • Audio output 1-ch • Preview resolution 4CIF • Interface type 2 SATA interface up to 2TB capacity • 3G antenna interface 2 antennas, SMA interface • Alarm input 4-ch • Alarm output 1-ch • IR remote controller • RS-485 port 	5875
Turbo HD DVR					
91	DS-7204HGHI-SH 1Audio			4 Turbo HD/Analog self-adaptive interfaces input, 4-ch video&1Ch Audio, HDMI, 1 SATA interface Up to 4 TB capacity for each disk, Network interface 10M / 100M, RS-485 Serial Interface, USB Port	1380
92	DS-7208HGHI-SH 1Audio			8 Turbo HD/Analog self-adaptive interfaces input, 8-ch video&1Ch Audio, HDMI, 1 SATA interface Up to 4 TB capacity for each disk, Network interface 10M / 100M, RS-485 Serial Interface, USB Port	2100
93	DS-7216HGHI-SH 1Audio			16 Turbo HD/Analog self-adaptive interfaces input, 16-ch video&1Ch Audio, HDMI, 2 SATA interface Up to 4 TB capacity for each disk, Network interface 10M / 1000M, RS-485 Serial Interface, USB Port	4200
Network Video Record (NVR)					
94	DS-7104NI-SN			<ul style="list-style-type: none"> ▶ 4-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 5MP/3MP/1080P/720P/4CIF Recording Resolution ▶ 1 SATA Interface Hard Disk Support 	1560
95	DS-7108NI-SN			<ul style="list-style-type: none"> ▶ 8-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 5MP/3MP/1080P/720P/4CIF Recording Resolution ▶ 1 SATA Interface Hard Disk Support 	1740
96	DS-7116NI-SN			<ul style="list-style-type: none"> ▶ 16-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 5MP/3MP/1080P/720P/4CIF Recording Resolution ▶ 1 SATA Interface Hard Disk Support 	2850
97	DS-7732NI-ST			<ul style="list-style-type: none"> ▶ 32-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 2-ch Audio Output ▶ 4 SATA Interface for 2 HDDs + 1 DVD-R/W (default), or 4HDDs (Up to 4TB capacity for each HDD) 	9870
98	DS-7104NI-SN/N			<ul style="list-style-type: none"> ▶ 4-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ Built-in switch network interface 4 independent 10 /100Mbps 	2500
99	DS-7108NI-SN/N			<ul style="list-style-type: none"> ▶ 8-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ Built-in switch network interface 8 independent 10 /100Mbps 	3300
100	DS-7116NI-SN/N			<ul style="list-style-type: none"> ▶ 16-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ Built-in switch network interface 8 independent 10 /100Mbps 	3800
101	DS-7108NI-SN/P			<ul style="list-style-type: none"> ▶ 8-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ 8 independent 10 /100 Mbps PoE Ethernet interfaces 	3870
102	DS-7116NI-SN/P			<ul style="list-style-type: none"> ▶ 16-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ 8 independent 10 /100 Mbps PoE Ethernet interfaces 	4170
103	DS-7104NI-SL/W (Wi-Fi)			<ul style="list-style-type: none"> ▶ 4-ch IP Video Input ▶ Two-way Audio Input ▶ 1 HDMI, 1 VGA Video Output ▶ 1-ch Audio Output ▶ 1 SATA Interface Hard Disk Support Up to 4TB for each disk ▶ RJ-45 10 /100 Mbps self-adaptive Ethernet interface 	2850
104	DS-7604NI-SE			20Mbps Bit Rate Input Max (up to 4-ch IP video), 1 SATA interface, 1U case	2550
105	DS-7608NI-E2			8-ch video input, Two-way audio input 1ch, 50Mbps Incoming bandwidth, 80Mbps Outgoing bandwidth, 5MP Recording resolution, HDMI/VGA output, 2 SATA interface for 2 HDDs Up to 4TB for each disk	2250
106	DS-7616NI-E2			16-ch video input, Two-way audio input 1ch, 100Mbps Incoming bandwidth, 80Mbps Outgoing bandwidth, 5MP Recording resolution, HDMI/VGA output, 2 SATA interface for 2 HDDs Up to 4TB for each disk	2550
107	DS-7716NI-E4			16-ch Video Input, Two-way Audio Input 1-ch, 100Mbps Incoming bandwidth, 80Mbps Outgoing bandwidth, HDMI/VGA output, 4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs, Up to 4TB capacity for each HDD, RS-232 and RS-485	6570
108	DS-7716NI-E4/16P			16-ch Video Input, Two-way Audio Input 1-ch, 100Mbps Incoming bandwidth, 80Mbps Outgoing bandwidth, HDMI/VGA output, 4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs, Up to 4TB capacity for each HDD, RS-232 and RS-485, 16 independent 100 Mbps PoE network interfaces	11000
109	DS-7732NI-E4			32-ch Video Input, 200Mbps Incoming bandwidth, 80Mbps Outgoing, 4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs, Up to 4TB capacity for each HDD, RS-232 and RS-485	8670
110	DS-9632NI-ST			Up to 80Mbps input, 160Mbps output, up to 128 network streams (up to 32-ch IP video), 8 SATA Interfaces, alarm I/O: 16/4	18870